


DLA-24D3



- ›Din rail plug-in surge protector
- ›1-pair
- ›Un: 24 V
- ›Shield wire protection
- ›Without line cut-off
- ›IEC 61643-21 compliance
- ›UL497A

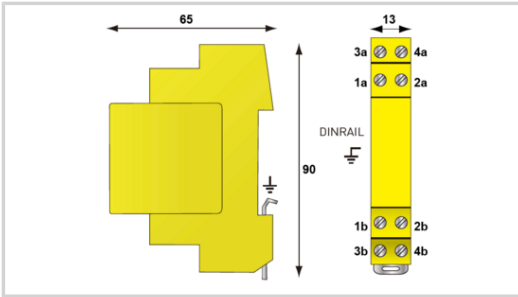

Electrical Characteristics		
Network		4-20 mA
Nominal line voltage	Un	24 V
Max. DC operating voltage	Uc	28 Vdc
Max. frequency	f max.	> 3 MHz
Max. discharge current max. withstand @ 8/20 μ s by pole	Imax	20 kA
Line inductance		No
Protection level Following the test category C3 (IEC61643-21) - Line/Line	Up	40 V
Nominal discharge current C2 Category	In	5 kA
Line resistance		< 4.7 Ohm
Mechanical Characteristics		
Technology		GDT+Clamping diode
SPD configuration		1-pair+shielded
Connection to Network		By screw terminal: cross section 0.5-2.5mm ²
Format		Plug-in DIN box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Short-circuit
Disconnection indicator		Transmission interrupt - default mode 2
Spare module(s)		DLAM-24D3
Dimensions		See diagram
Standards		
Standards compliance		IEC 61643-21 / EN 61643-21 / UL497A
Certification		UL Listed
Part number		
6403011		