




CITEL



Type 2+3 single-phase surge protector and filter

DS-HF

- › Surge protector with RFI filtering
- › In : 3 kA
- › Imax : 10 kA
- › Common and Differential mode protection
- › Low protection level
- › Operating/disconnection indicators
- › EN 61643-11, IEC 61643-11, UL1449 ed.5 compliance

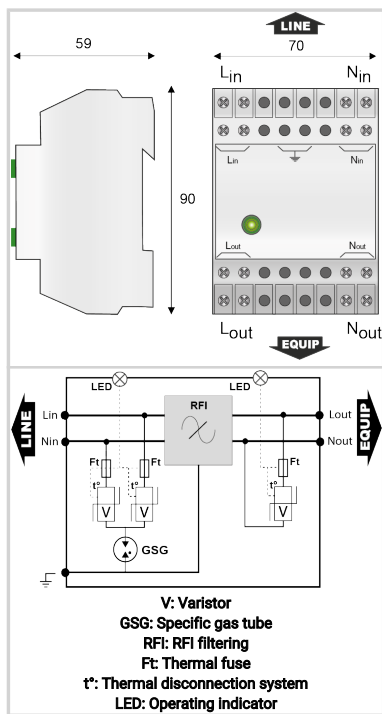

Electrical Characteristics		
SPD type	IEC	2+3
Network		230/400V
AC system		TT-TN
Nominal line voltage	Un	230 Vac
Max. AC operating voltage	Uc	255 Vac
Max. load current @25°C	IL	16 A
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	440 Vac disconnection
Residual Current Leakage current to Ground	Ipe	< 1 mA
Follow current	If	None
Nominal discharge current 15 x 8/20 μ s impulses	In	3 kA
Max. discharge current max. withstand @ 8/20 μ s by pole	Imax	10 kA
Total Maximum discharge current max. total withstand @ 8/20 μ s	Imax Total	10 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50 μ s - 8/20 μ s	Uoc	10 kV
Withstand on overvoltages IEEE C62.41.1		10 kV
RFI Filtering		0.1 - 30 MHz
Connection mode(s)		L/N/PE
Protection mode(s)		Common/Differential mode
Protection level @ In (8/20 μ s)	Up	1 kV / 0.8 kV
Admissible short-circuit current	Iscrr	10 000 A
Mechanical Characteristics		
SPD configuration		Single phase
Connection to Network		By screw terminals: 0.75-4mm ²
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		Green LED(s) OFF
Dimensions		See diagram
Disconnectors		
Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		Fuses type gG - 20 A max. (if necessary)
Standards		
Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification		
Part number		
77945		

