





CITEL

Type 2 PV Surge Protector for PCB mounting

PPV40GS-10-1200

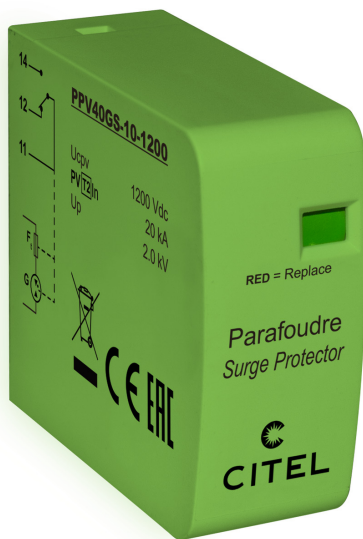

- › Type 2 surge protector for Photovoltaic
- › PCB mounting
- › N/PE module
- › I_{max}: 40 and 25 kA
- › Application up to 1500 Vdc PV powerline
- › Remote signaling
- › EN 50539-11 and IEC 61643-31 compliance*

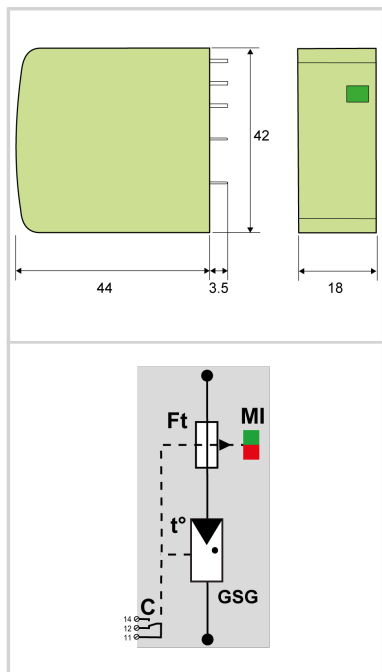

Electrical Characteristics

SPD type	IEC	2
Max. PV operating voltage	U _{cpv}	1200 Vdc
PV Permanent Operating current <i>Current consumption at U_{cpv}</i>	I _{cpv}	None
Nominal discharge current <i>15 x 8/20 μs impulses</i>	I _n	20 kA
Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	I _{max}	40 kA
Current withstand short circuit PV	I _{scpv}	15 000 A
Protection level <i>@ I_n (8/20 μs)</i>	U _p	2.8 kV

Mechanical Characteristics

Technology	Gas discharge tube
Connection to Network	Through soldering pins
Mounting	On Printed Circuit Board
Housing material	Thermoplastic UL94 V-0
Operating temperature	T _u -40/+85°C
Protection rating	IP20
Disconnection indicator	1 mechanical indicator
Remote signaling of disconnection	Output on changeover contact
Dimensions	See diagram

Disconnectors

Thermal disconnector	Internal
Back-up protection device	Without

Standards

Standards compliance	IEC 61643-31 / EN 50539-11 *The standard cover devices: PPV /PAC series are components. Compliant when combined is an assembly.
----------------------	---

Part number

8722608

